



HEAVY DUTY TOOLS & EQUIPMENT



OT7503

Outer Tie Rod Remover

- Works on FWD and RWD Import and Domestic Vehicles
- Up to 5 Tons of Force can be Applied

USER \$131.96 SRP **\$103.91**

OT1021

1-Ton Grip-O-Matic Puller

- 3-Jaw, 2¹/₈" Max Reach, 3¹/₄" Max Spread
- ⁵/₁₆" - 24 x 3⁷/₈" Screw
- ⁹/₆₄" Jaw Thickness, ¹/₄" Width
- Forged from Quality Steel, Heat Treated

USER \$95.88 SRP **\$75.51**



OT303-562 (OT6469)

Ford Syncro Positioning Tool

Ford Camshaft Sensor Synchronizer Tool for Servicing: 1996 - 1998 3.8L V6 Mustang, Windstar; 1997 3.8L V6 Thunderbird/Cougar; 1997 - 2002 4.2L V6 Econoline, F-Series Truck; 1996 - 1998 5.0L V8 Ford Explorer, Mercury Mountaineer

LTD QTY



SRP **\$180.63**

OT303-529 (OT6472)

Ford Camshaft Sensor Synchronizer Tool

- Works on 1995 - 1997 3.0L, V6 Windstar, Aerostar & Ranger 1996 - 1997 3.0L 2-Valve V6 Ford Taurus & Mercury Sable 1996 - 1998 4.0L V6 Aerostar, Ranger & Explorer
- Used to Synchronize the Camshaft Sensor to the No 1 Cylinder

LTD QTY



SRP **\$234.35**

OT7677 Exhaust Hanger Pliers

- To remove Rubber Blocks Supporting Exhaust System Hanger Brackets
- Features a 2-Position Slip Joint for use on many Sizes of Hanger Blocks

USER \$430.82

SRP **\$339.26**



OT230582

O2 Sensor, Class R-21A

MADE IN U.S.A.

SRP **\$189.75**

LTD QTY



OT307-437 (OT6604)

Transmission Fluid Fill Adapter

LTD QTY



- A Required Tool to Fill or Add Fluid to the 5R55W Automatic Transmission used on 2003 - Newer Ford Explorer

SRP **\$56.37**

OT6509

³/₈" & ⁵/₁₆" Fuel Line Disconnect Tool

- Low Profile Design for GM, Ford, & Chrysler Vehicles



USER \$31.43 SRP **\$24.75**

OT5606 Compression Tester Kit

- Designed for Complete Compression Testing on Gasoline Engines, Including Domestic, Imports, Motorcycles, Marine & Small Engines
 - Corrosion Resistant Nickel Plated Finish
 - Adapters for both Flat and Tapered Seat Plugs
 - Professional Quality Gauge with Zero Adjust
- 26" Flex Hose Gauge Assembly w/Quick Coupler
 - 2¹/₂" Gauge features Chrome Bezel & Rugged Protective Outer Boot
 - Dual Scale Gauge Reads 0-300 psi & 0-2100kPa
- 12" Flex - 14mm Standard Reach
 - 12" Flex - 14mm Long Reach
- 10, 12 & 18mm Tread Adapters
- Repair Parts Kit • Case



USER \$143.02 SRP **\$112.61**

OT7998

Chrysler Fuel Pump Module Spanner Wrench

- Removes & Installs Fuel Pump Retaining Ring that Holds Fuel Pump Module onto Gas Tank
- For most 1994-2005 Chrysler Vehicles, & 1995-2004 Jeep Vehicles




USER \$225.60 SRP **\$177.67**

OT216094

Universal Test Lead Set

- Hyundai, Diahatsu; Mitsubishi 1985 - 1988; 1989 - 1992




LTD QTY

SRP **\$17.37**

OT1769A

Truck Dual Wheel Dolly

- 1,500 Capacity Dolly will Remove, Transport & Replace Dual Wheel & Tire Assemblies without Strain or Struggle
- Swivel Casters: 3¹/₂" Front & 3" Rear
- 43" by 42" Floor Space
- Hydraulic Jack Provides over 6¹/₂" of Lift & Tilts Wheel Assembly 7° to Prevent Damage to Wheel Seal
- Includes: 6' Support Chain to Hold Load in Place

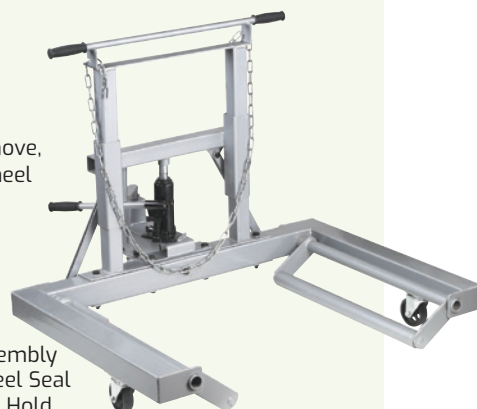

USER \$1,027.74 SRP **\$867.16**

MOVE, LIFT & PULL